


STANDARD ROGING SPECIFICATIONS			
	STIMMUS	Ø (mm)	SIZE
V (vertical)	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
O (oblique)	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
D (diagonal)	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
P (parallel)	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
B (boustrophedon)	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40
	WBE	12	40

MAST SECTION SPARCRAFT						
SECTION	dim X/Y (mm)	I XX (cm4)	I YY (cm4)	WEIGHT (Kg/m)	THICKNESS (mm)	SLIDER (mm)
F1060	264/144	1060	3250	9.94	4.8	23

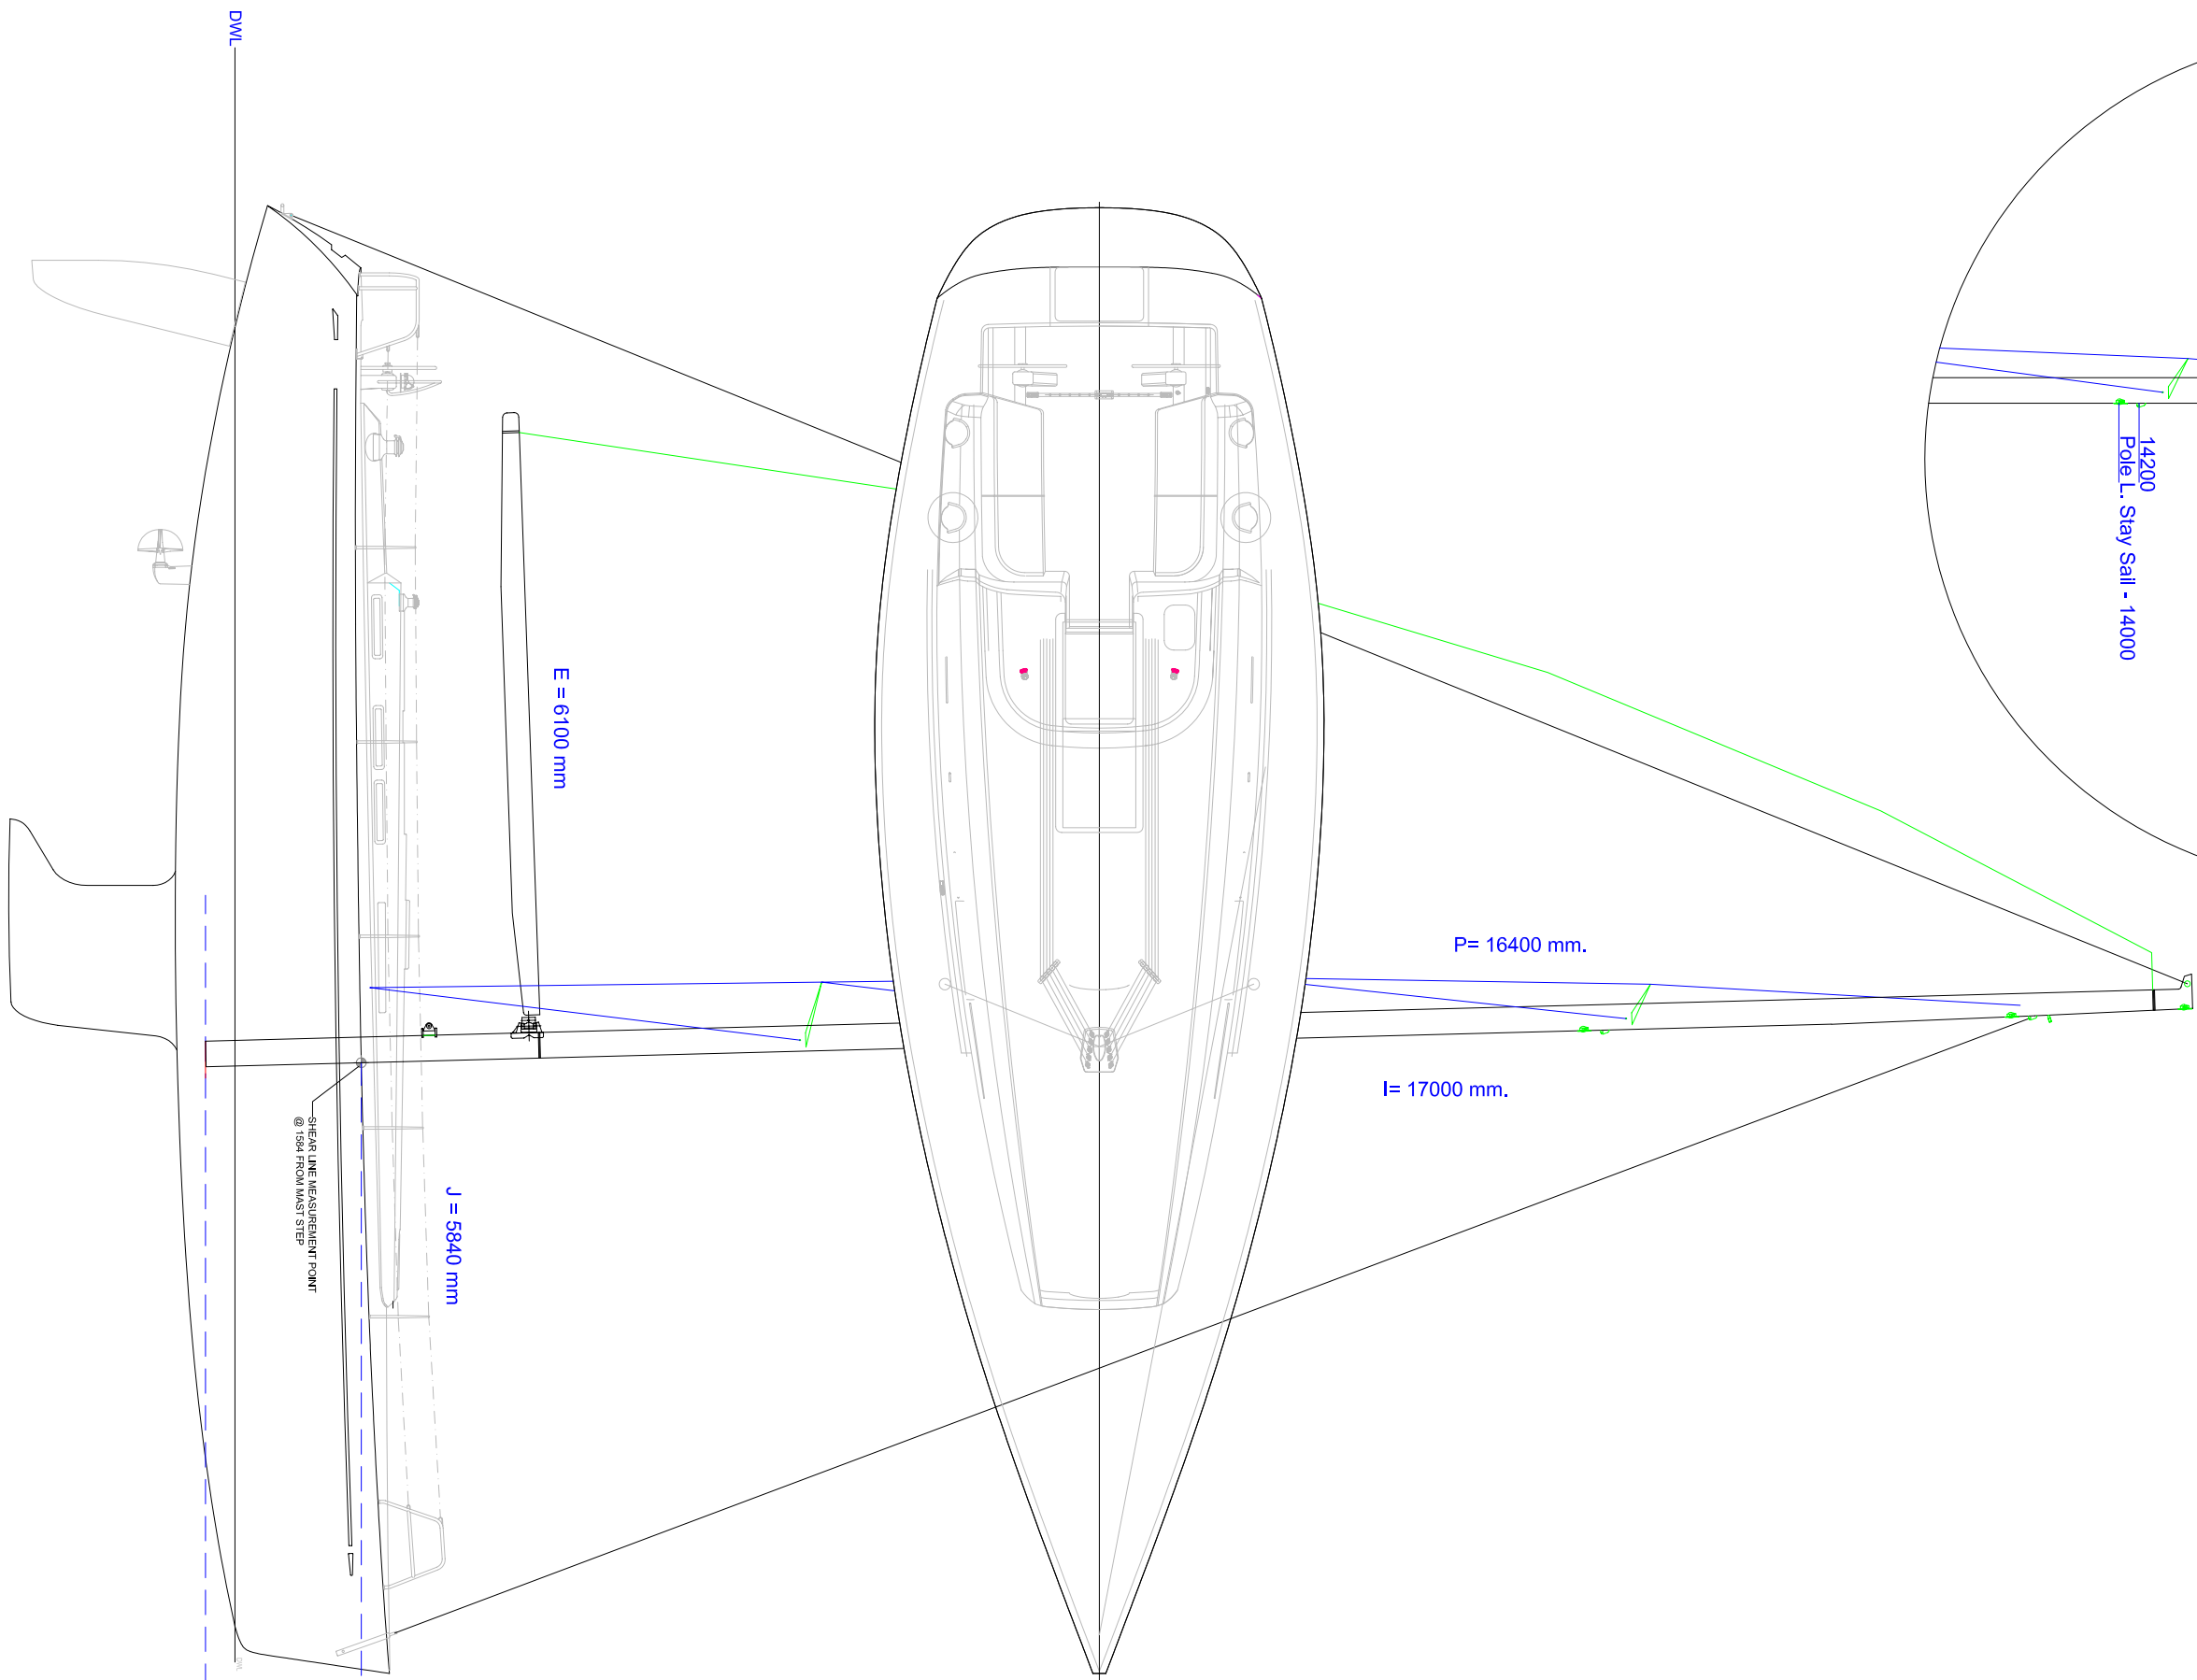